




Punches & Dies

PROFLEX® > Urethane Strippers

Proflex® urethane strippers are offered in the following diameters and lengths. Inside diameters are sized for light press fit over standard perforating punch body diameters. Proflex® urethane strippers are stocked in Shore 95A durometer but other durometers and other sizes are available on special order. Strippers are yellow in color.

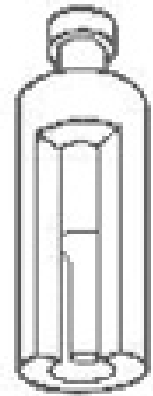

For best results, Proflex® urethane should not exceed a deflection on 20%.
 Dimensions shown are catalog guidelines-exceptions available at additional cost

| Proflex® Urethane Strippers Catalog Information | | | | |
|---|---------------------|---------------|------------------|---------------------------|
| Catalog Designation | Punch Body Diameter | Stripper O.D. | Length in Inches | Load per .125" Deflection |
| US1A X 1.00 | .1875 | .687 | 1.00 | 285 |
| US1A X 1.25 | | | 1.25 | 260 |
| US1A X 1.50 | | | 1.50 | 240 |
| US1A X 1.75 | | | 1.75 | 200 |
| USF1A | | | 12.00 | -- |
| US2 X 1.00 | .2500 | .750 | 1.00 | 380 |
| US2 X 1.25 | | | 1.25 | 292 |
| US2 X 1.50 | | | 1.50 | 251 |
| US2 X 1.75 | | | 1.75 | 214 |
| USF2 | | | 12.00 | -- |
| US2A X 1.00 | .3125 | .812 | 1.00 | 375 |
| US2A X 1.25 | | | 1.25 | 322 |
| US2A X 1.50 | | | 1.50 | 276 |
| US2A X 1.75 | | | 1.75 | 236 |
| USF2A | | | 12.00 | 210 |
| US3 X 1.00 | .3750 | .875 | 1.00 | 519 |
| US3 X 1.25 | | | 1.25 | 398 |
| US3 X 1.50 | | | 1.50 | 380 |
| US3 X 1.75 | | | 1.75 | 322 |
| US3 X 2.00 | | | 2.00 | 293 |
| USF3 | | | 12.00 | -- |
| US4 X 1.00 | .5000 | 1.0000 | 1.00 | 599 |
| US4 X 1.25 | | | 1.25 | 398 |
| US4 X 1.50 | | | 1.50 | 380 |
| US4 X 1.75 | | | 1.75 | 322 |
| US4 X 2.00 | | | 2.00 | 293 |
| USF4 | | | 12.00 | -- |
| US5 X 1.00 | .6250 | 1.125 | 1.00 | 658 |
| US5 X 1.25 | | | 1.25 | 522 |
| US5 X 1.50 | | | 1.50 | 439 |
| US5 X 1.75 | | | 1.75 | 378 |
| US5 X 2.00 | | | 2.00 | 345 |
| USF5 | | | 12.00 | -- |
| US6 X 1.00 | .7500 | 1.5000 | 1.25 | 1,140 |
| US6 X 1.25 | | | 1.50 | 948 |
| US6 X 1.50 | | | 1.75 | 805 |
| US6 X 1.75 | | | 2.00 | 691 |
| US6 X 2.00 | | | 2.25 | 619 |
| US6 X 2.25 | | | 2.50 | 555 |
| US6 X 2.50 | | | 2.75 | 489 |
| US6 X 2.75 | | | 12.00 | -- |
| USF6 | | | -- | -- |
| US8 X 1.25 | 1.0000 | 2.000 | 1.25 | 1,814 |
| US8 X 1.50 | | | 1.50 | 1,404 |
| US8 X 1.75 | | | 1.75 | 1,136 |
| US8 X 2.00 | | | 2.00 | 1,000 |
| US8 X 2.25 | | | 2.25 | 900 |
| US8 X 2.50 | | | 2.50 | 819 |
| US8 X 2.75 | | | 2.75 | 744 |
| USF8 | | | | |